



# UNIQUIN as aluminium block frame

By using the adapter profile, the UNIQUIN frame forms a complete aluminum block frame for lateral installation in the wall opening. This application, as well as the installation situation in the glass wall, offers a wide range of variants and UNIQUIN options.

## Glass (symbolic with frame, size 2)

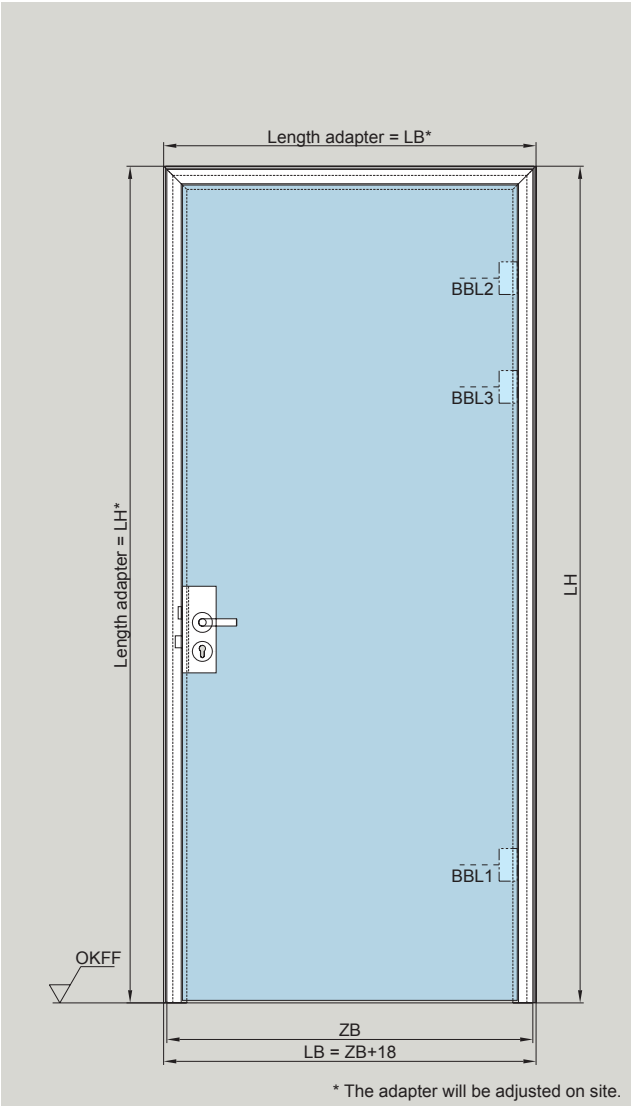

## Sectional view of glass example

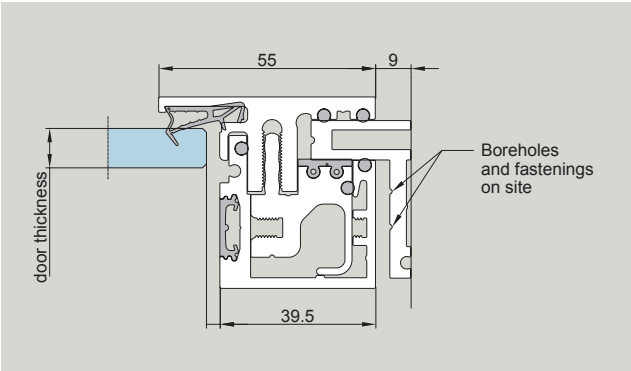

Adapter profile	Glass thickness [mm]	"The Detail" Glass door	Timber door thickness [mm]	"The Detail" Timber door
10	10	50-010B	38	50-010H1
12	12	50-010B	40	50-010H1
12.76	12.76	50-010C	40.5	50-010H2
13.52	13.52	50-010C	41.5	50-010H2
15	15	50-010C	43	50-010H2
16.76	16.76	50-010C	44.5	50-010H2
17.52	17.52	50-010B	45.5	50-010H1
19	19	50-010C	47	50-010H2

LB = Clear width  
LH = Clear height  
ZB = Frame width  
BBL = Hinge datum line

## Sectional view glass door

