


UNIVERSAL

Pinch free patch fittings with 15 mm pivot point, complete, for 10 mm glass thickness Accessories see page 222.



Product description

Art. No.

01.201


Bottom patch

complete with pivot insert and pivot bearing, with cover plate, height adjustable by 5 mm; floor clearance see page 76

Weight in kg:

Aluminum 0.560 Stainless steel 0.622

Construction details

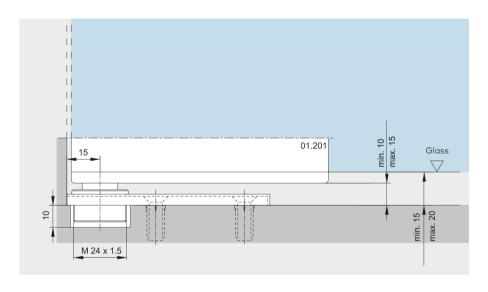

Using the bottom patch on pivot bearing with cover plate (Art. No. 01.201) the air gap between floor and glass is 15–20 mm (by height adjustability).

To reduce the air gap to 10 mm: Embed base plate into the floor.